

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
7 July 2005 (07.07.2005)

PCT

(10) International Publication Number
WO 2005/061362 A1

(51) International Patent Classification⁷: **B66B 5/00**

(21) International Application Number:
PCT/US2003/037242

(22) International Filing Date:
18 November 2003 (18.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **OTIS ELEVATOR COMPANY** [US/US]; Ten Farm Springs Road, Farmington, CT 06032 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MONZON SIMON, Andres** [ES/ES]; Plaza de Espana 7, 3 A Leganes, E-28911 Madrid (ES). **DEL RIO SANZ, Fernando** [ES/ES]; Paseo Pascual Saorin 17, Torreldones, E-28250 Madrid (ES).

(74) Agent: **GASKEY, David, J.**; Carlson, Gaskey & Olds, 400 W. Maple Rd., Ste. 350, Birmingham, MI 48009 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ELEVATOR GOVERNOR DEVICE

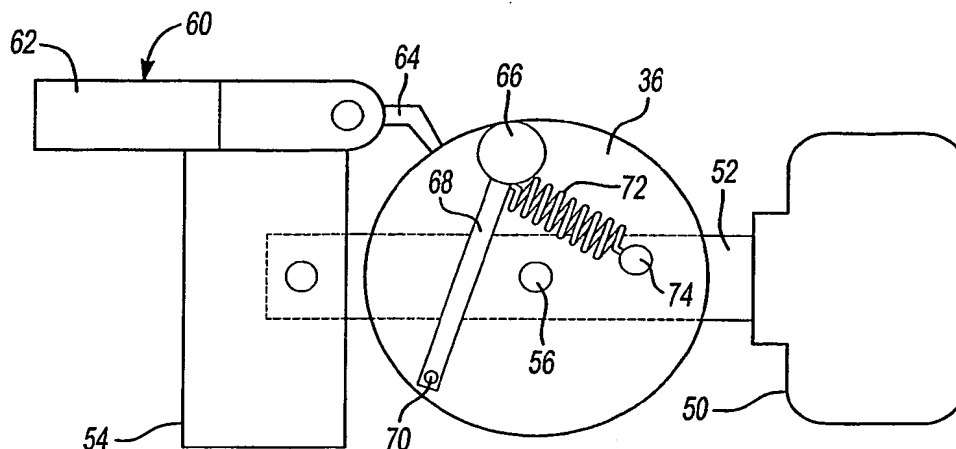

(57) Abstract: An elevator governor includes a selectively powered switch (60) that is activated when an elevator car moves at a speed that exceeds a selected limit. The speed limit is lower than normally expected car speeds during normal elevator operation. The switch (60) is activated by a moving member (66) that moves into a switch-activation position responsive to movement of a rotating member (36) that corresponds to movement of an elevator car. The arrangement allows for a primary governor to prevent elevator speeds from exceeding a first selected limit and a secondary governor to prevent elevator speeds from exceeding a second, lower limit.